




# 260MRT

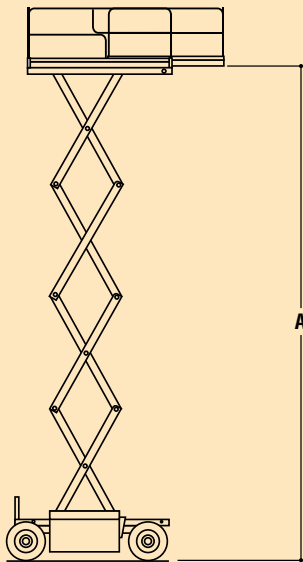

## DIMENSIONAL DATA

A.	Platform Height Elevated . . . . .	26 ft. (7.92 m)
B.	Platform Height Lowered . . . . .	4 ft. 1.5 in. (1.26 m)
C.	Platform Railing Height . . . . .	3 ft. 7.5 in. (1.0 m)
D.	Overall Height . . . . .	7 ft. 9.5 in. (2.37 m)
E.	Platform Size . . . . .	65 x 102 in. (1.65 x 2.59 m)
F.	Platform Extension . . . . .	4 ft. (1.22 m)
G.	Overall Width . . . . .	5 ft. 9 in. (1.75 m)
H.	Overall Length (no outriggers). . . . .	8 ft. 9 in. (2.67 m)
I.	Wheelbase . . . . .	6 ft. 6 in. (1.98 m)
J.	Ground Clearance . . . . .	8 in. (20 cm)
	Platform Capacity . . . . .	1,250 lbs. (567 kg)
	Capacity on Deck Extension. . . . .	300 lbs. (136 kg)
	Lift/Lower Speed . . . . .	27/21 sec.
	Maximum Drive Height . . . . .	Full Height
	Gross Vehicle Weight . . . . .	7,300 lbs. (3,311 kg)

## CHASSIS

Drive Speed-Lowered . . . . .	3.5 mph (5.6 kph)
Drive Speed-Elevated . . . . .	0.4 mph (0.6 kph)
Gradeability . . . . .	35%
Turning Radius (inside). . . . .	84 in. (2.13 m)
Tire Size/Type . . . . .	26 x 12 Lug Tread
Brakes . . . . .	Spring Applied Hydraulically Released

## POWER SYSTEM

Dual Fuel Engine . . . . .	Kubota 24.5 hp (18.3 kW)
Diesel Engine . . . . .	Kubota 26 hp (19.4 kW)
Fuel Tank Capacity . . . . .	7.5 gal. (28.4 L)
Hydraulic Reservoir . . . . .	15 gal. (56.9 L)