
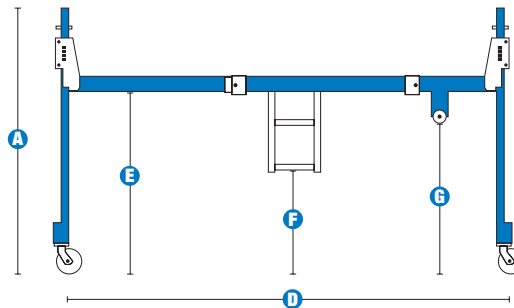


# Specifications

MODELS			AWP™-30S	
MEASUREMENTS			US	Metric
Working height*			35 ft 6 in	11.00 m
Platform height			29 ft 6 in	9.00 m
<b>A</b> Height - stowed (Standard, Narrow) stowed (RT)			6 ft 6 in 6 ft 7 in	1.98 m 2.01 m
<b>B</b> tilted back** (Standard)			6 ft 2.5 in	1.89 m
<b>C</b> Length - stowed (Standard) stowed (Narrow) stowed (RT)			4 ft 5 in 4 ft 7 in 5 ft 3 in	1.35 m 1.40 m 1.60 m
<b>D</b> Length - tilted back**			6 ft 11 in	2.11 m
<b>E</b> Width (Standard) Width (Narrow) Width (RT)			2 ft 5 in 1 ft 10 in 2 ft 6 in	.74 m .56 m .76 m
PRODUCTIVITY				
Lift capacity			350 lbs	159 kg
ANSI/CSA:				
<b>F</b> Outrigger footprint (l/w) (Standard)			5 ft 9 in/5 ft 1 in	1.75/1.55 m
<b>G</b> Outrigger footprint (l/w) (Narrow/RT)			6 ft/5 ft	1.83/1.52 m
Corner access*** (Standard)			1 ft 7 in	.48 m
<b>H</b> Corner access*** (Narrow/RT)			1 ft 7 in	.48 m
Wall access front/side (Standard)			5 in/1 ft 5 in	.13/.43 m
<b>I</b> <b>J</b> Wall access front/side (Narrow/RT)			7 in/1 ft 5 in	.18/.43 m
CE/AUS/PB Indoor:				
Outrigger footprint (l/w) (Standard)			6 ft 4 in/5 ft 8 in	1.93/1.73 m
<b>F</b> <b>G</b> Outrigger footprint (l/w) (Narrow/RT)			6 ft 11 in/6 ft 2 in	2.11/1.88 m
Corner access*** (Standard)			1 ft 10 in	.56 m
<b>H</b> Corner access*** (Narrow/RT)			2 ft 3.5 in	.70 m
Wall access front/side (Standard)			8 in/1 ft 9 in	.20/.53 m
<b>I</b> <b>J</b> Wall access front/side (Narrow/RT)			9 in/1 ft 8 in	.23/.51 m
CE/AUS/PB Outdoor:				
Outrigger footprint (l/w) (Standard)			9 ft 9 in/9 ft 2 in	2.97/2.79 m
<b>F</b> <b>G</b> Outrigger footprint (l/w) (Narrow/RT)			10 ft 10 in/11 ft 4 in	3.30/3.45 m
Corner access*** (Standard)			2 ft 3 in	.69 m
<b>H</b> Corner access*** (Narrow/RT)			5 ft 1 in	1.55 m
Wall access front/side (Standard)			2 ft 3 in/3 ft 6 in	.69/1.07 m
<b>I</b> <b>J</b> Wall access front/side (Narrow/RT)			2 ft 11 in/4 ft 7 in	.89/1.40 m
Platform Dimensions: (l/w/h)				
Standard			27/26/44.75 in	.69/.66/1.14 m
Gated standard			27/26/44.75 in	.69/.66/1.14 m
Gated ultra narrow			22/18/44.75 in	.56/.46/1.14 m
Gated narrow			26/20/44.75 in	.66/.51/1.14 m
Standard fiberglass			29/26.5/43.5 in	.74/.67/1.10 m
Narrow fiberglass			26/22/43.5 in	.66/.56/1.10 m
POWER				
Power source - AC or DC models			12V DC / 110/50-60 Hz or 220/50-60 Hz AC	
WEIGHT				
AC models (Standard)			777 lbs	352 kg
AC models (Narrow/RT)			729 lbs	331 kg
DC models (Standard)			867 lbs	393 kg
DC models (Narrow/RT)			818 lbs	371 kg
Air motor (Standard)			777 lbs	352 kg
Air motor (Narrow/RT)			729 lbs	331 kg

# Specifications

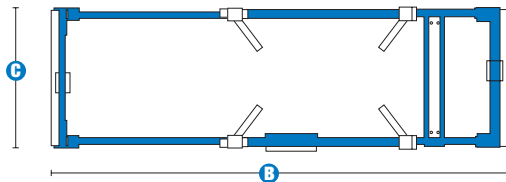

## SUPER STRADDLE MODELS

## AWP™-30S

MEASUREMENTS		US	Metric
<b>A</b> Height		5 ft 10 in	1.78 m
<b>B</b> Length (adjustable)		9 ft 1 in – 10 ft 8 in	2.77 – 3.25 m
<b>C</b> Width		3 ft 2 in	.97 m
Width with required outriggers			
ANSI		6 ft 8.25 in	2.03 m
CSA		10 ft .25 in	3.05 m
<b>D</b> Wheelbase (adjustable)		8 ft 8 in – 10 ft 8 in	2.64 - 3.25 m
<b>E</b> Straddle clearance		4 ft	1.22 m
<b>F</b> Height to ladder		2 ft 3 in	.69 m
<b>G</b> Height to fixed wheel		3 ft 4 in	1.02 m
Storage dimensions (l/w/d)		80/37/24 in	2.03/0.94/0.61 m
WEIGHT			
		580 lbs	263 kg